

Fabric catalogue
Selected by Mobles 114

Mobles114

A

Gabriel Cura
Spradling Valencia

B

Gabriel Step
Gabriel Step Melange


C

Gabriel Capture
Kvadrat Remix 2

D


Kvadrat Divina Melange
Kvadrat Steelcut Trio 2

Group A Gabriel Cura

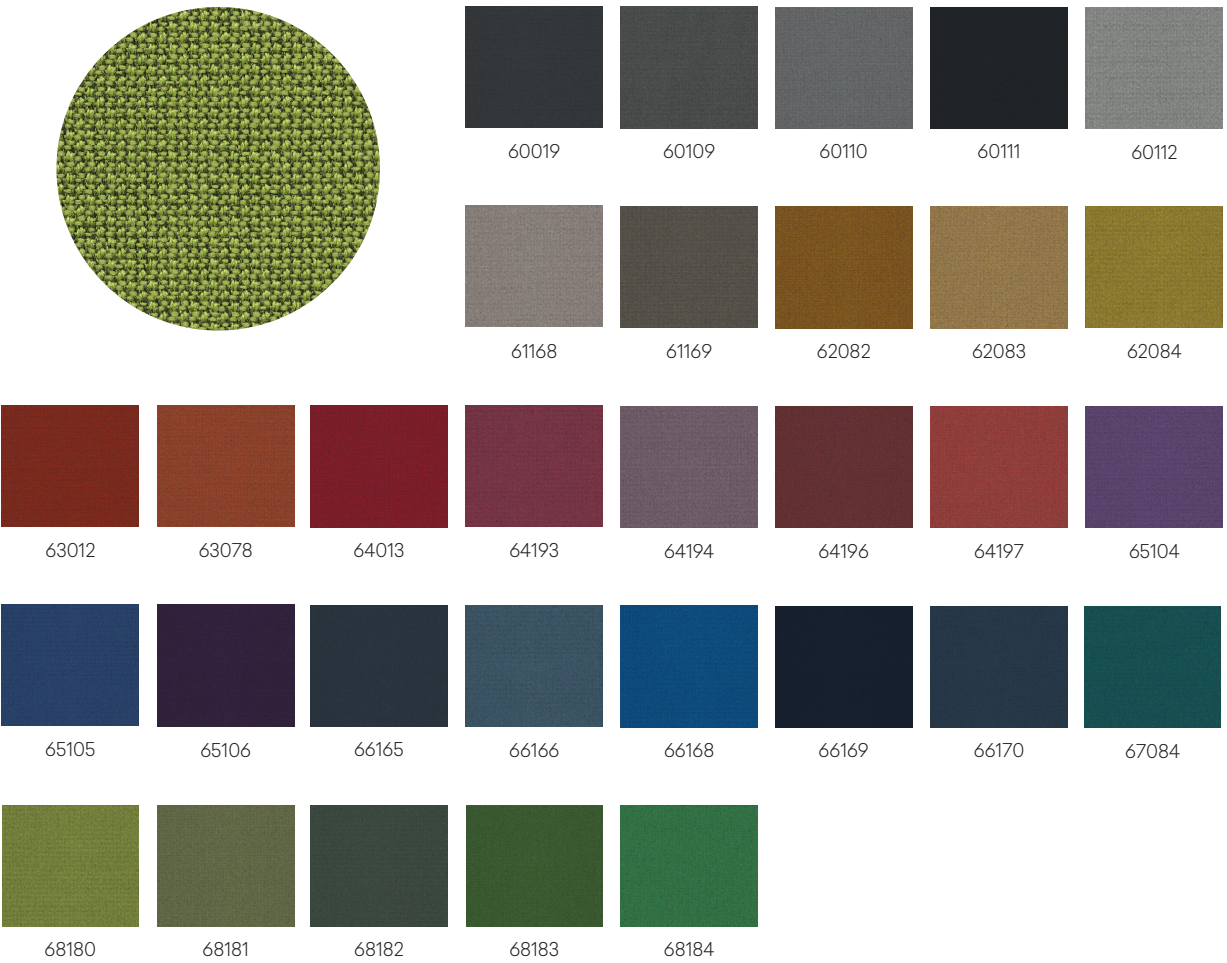


Material	post - costumer recycled polyester · polyester	98% · 2%
Weight	420 g/lm · (13.55 oz/lin.yd.)	
Width	140 cm · (55")	
Abrasion resistance	rubs · BS EN 14465 · BS EN ISO 12947-2 (Martindale) 100,000 double rubs wyzenbeek (ASTM D4157) (Heavy Duty Upholstery) 100,000	
Pilling	scale 1-5 max. 5 · EN ISO 12945-2	
Maintenance	wash or dry cleaning Flame retardant performance is dependent upon the foam used. Contain no Flame Retardant chemical.	
Flammability	EN 1021 1&2 · BS 5852 0&1 · CA TB 117 - 2013 Will also pass other flammability standards. 40°C · Shrinkage max. 1,0% 60°C · Shrinkage max. 2,0%	

Group A Spradling Valencia

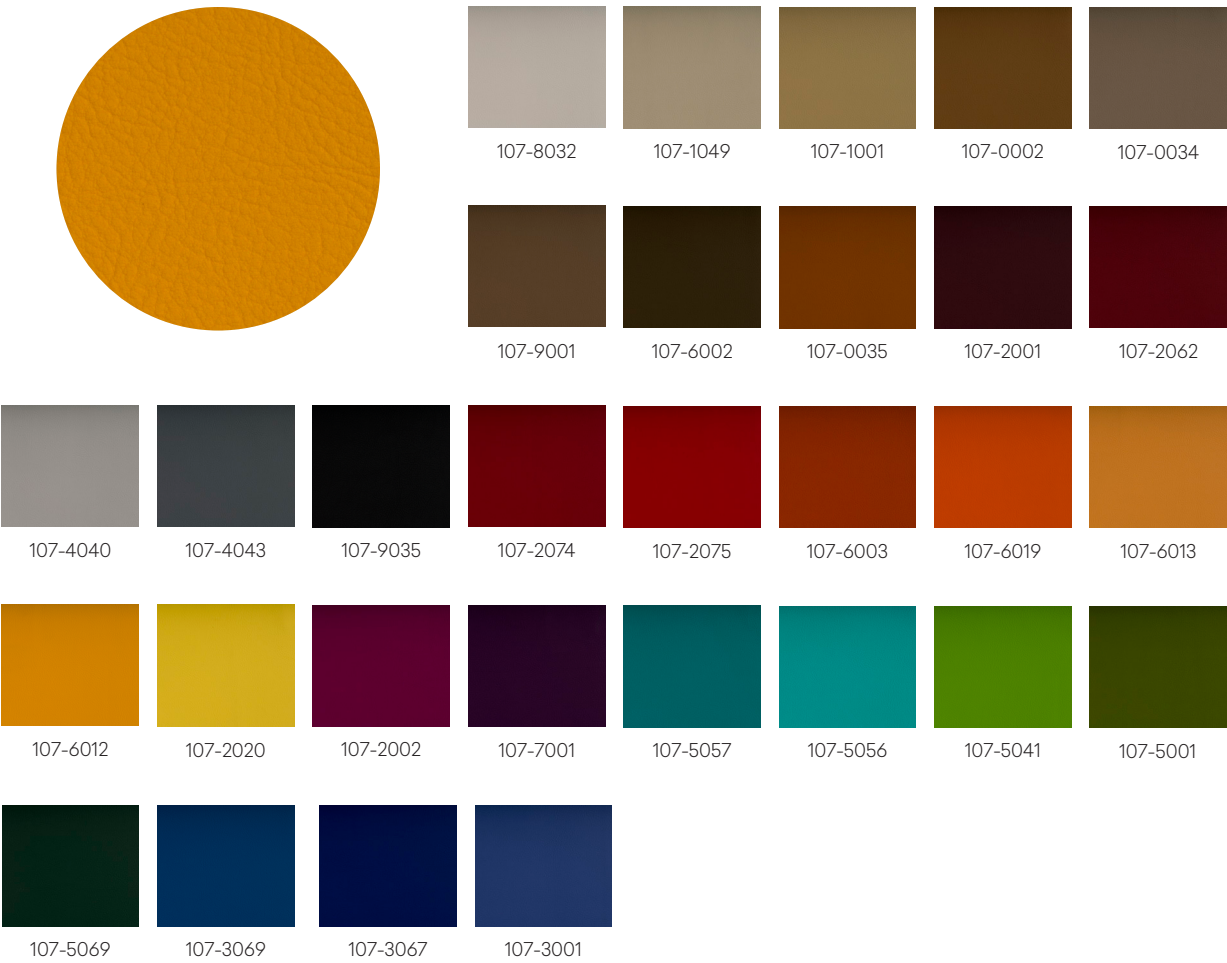

Material	Vinyl / Urethane
Weight	650 g/m2
Width	137 cm · (53")
Abrasion resistance	>300.000 cycled (Martindale)
Pilling	scale 1-5 max. 5 · EN ISO 12945 - 2
Maintenance	For light soiling, a solution of 10% household liquid dishsoap in warm water, applied with a soft damp cloth. Rinse with clean water and dry. Do not use with alcohol based cleaning agents.
Flammability	EN 1021 1&2 · ES: UNE 23.727-90 1R/M.2 · FR: NF P 92-503/M2 DE: DIN 4102 B2 · AT: ÖNORM B 3825, Gruppe 1 - Schwerbrennbares IT: UNI 9175 (1987) / UNI 9175/FA1 (1994) Classe 1.IM (UNO I EMME) AT: ÖNORM A 3800 Teil 1, Qualmbildungsklasse Q1 - schwachqualmend IMO FTP 2010 Code MSC.307 (88) Part 8 3.1 & 3.2 · US: FMVSS 302 US: FAR 25/853 · ECE R118.02 (replaces Directive 95/28/CE) 6, 7 & 8 EN 71-2:2006+A1:2007 - Safety of Toys - Parte 2: Flammability

Group B Gabriel Step

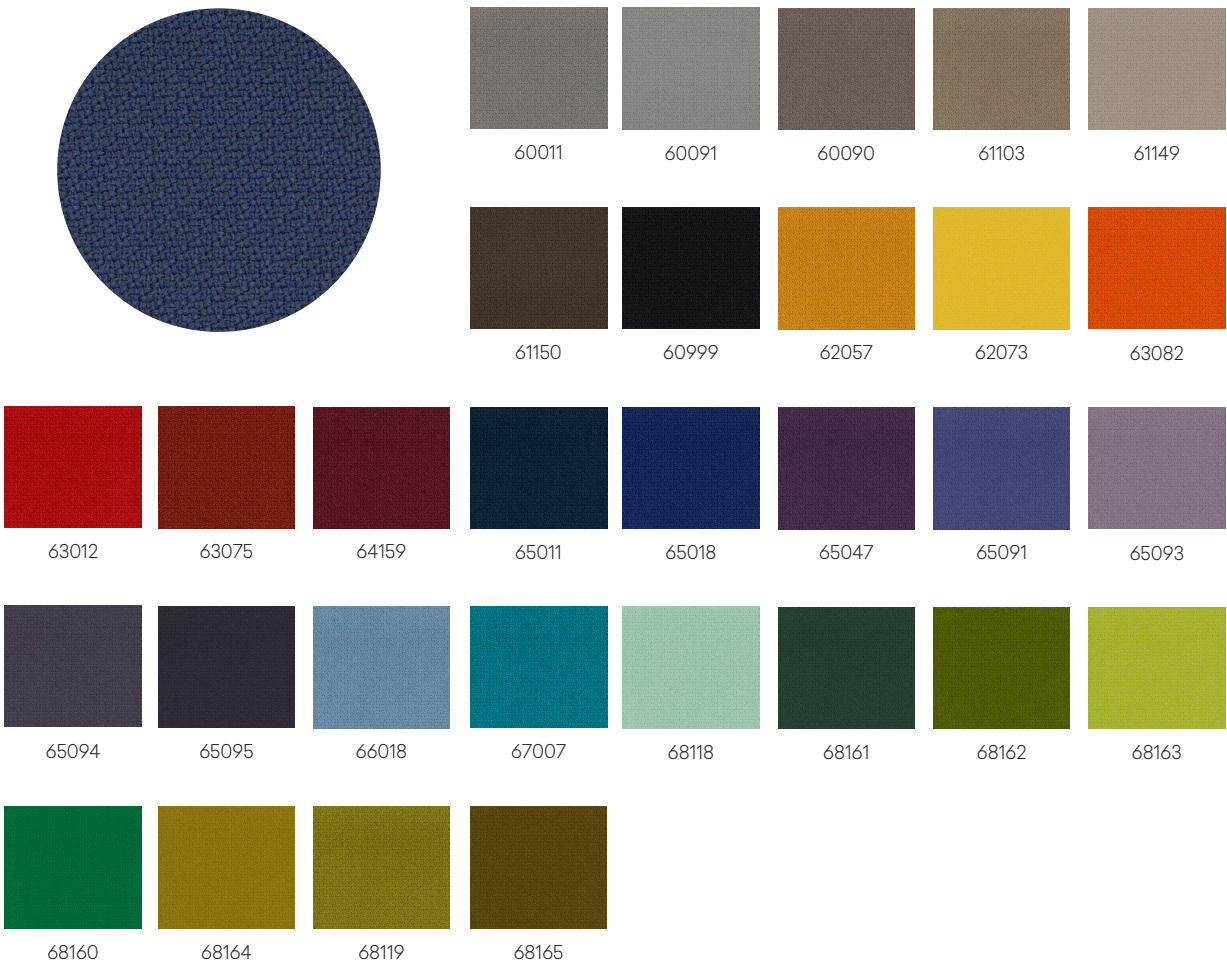


Material	Trevira CS	100%
Weight	470 g/lm · (15.16 oz/lin.yd.)	
Width	140 cm · (55")	
Abrasion resistance	rubs · EN ISO 12947-2 (Martindale) 100,000 double rubs wyzenbeek (ASTM D4157-07) (Heavy duty upholstery) 100,000	
Pilling	scale 1-5 max. 5 · EN ISO 12945 - 2	
Maintenance	Wash or dry cleaning. Can be wiped with Virkon S, Actichlor Plus, Prime Source ren 93 or Ethanol (70-85%). Always follow the manufacturer's instructions and finish by wiping with a damp cloth. 60°C · Shrinkage max. 3,0% / 74°C · Shrinkage max. 5,0%	
Flammability	CA TB 117 - 2013 BS 7176 Medium Hazard. AM 18 - NF D 60-013-(only for fabric) · DIN 4102 B1 · NFP 92-503/504/505 M1. BS EN 1021 1&2 · BS 5852 Part 1 0,1 Cigarette & match · BS 5852 Crib 5. Class Uno UNI 9175 Class 1 EMME · ÖNORM B 3825 - B1 - 3800 - Q1 UK. FAR/JAR 25.853 (a) (i) (ii) · IMO MSC 307(88) Annex 1 part 8. MED Certificate IMO · DIN EN 13501 - 1 B-s1, d0. Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used.	

Group B Gabriel Step Melange




Material	Trevira CS	100%
Weight	470 g/lm · (15.16 oz/lin.yd.)	
Width	140 cm · (55")	
Abrasion resistance	rubs · EN ISO 12947-2 (Martindale) 100,000 double rubs wyzenbeek (ASTM D4157-07) (Heavy duty upholstery) 100,000	
Pilling	scale 1-5 max. 5 · EN ISO 12945 - 2	
Maintenance	Wash or dry cleaning. Can be wiped with Virkon S, Actichlor Plus, Prime Source ren 93 or Ethanol (70-85%). Always follow the manufacturer's instructions and finish by wiping with a damp cloth. 60°C · Shrinkage max. 3,0% / 74°C · Shrinkage max. 5,0%	
Flammability	CA TB 117 - 2013 BS 7176 Medium Hazard. AM 18 - NF D 60-013-(only for fabric) · DIN 4102 B1 · NFP 92-503/504/505 M1. BS EN 1021 1&2 · BS 5852 Part 1 0,1 Cigarette & match · BS 5852 Crib 5. Class Uno UNI 9175 Class 1 EMME · ÖNORM B 3825 - B1 - 3800 - Q1 UK. FAR/JAR 25.853 (a) (i) (ii) · IMO MSC 307(88) Annex 1 part 8. MED Certificate IMO · DIN EN 13501 - 1 B-s1, d0. Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used.	

Group C Gabriel Capture

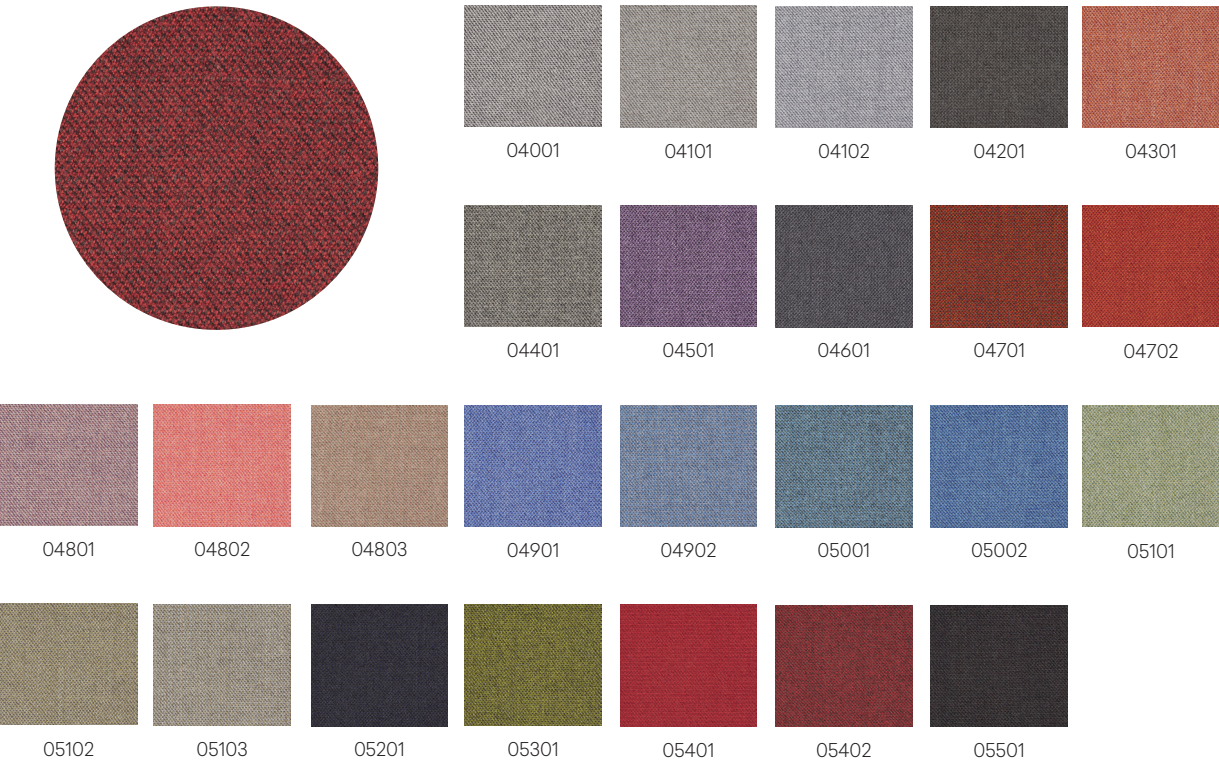


Material	New Zealand wool · polyamide	85% · 15%
Weight	475 g/lm 3 (15.32 oz/lin.yd.)	
Width	140 cm · (55")	
Abrasion resistance	rubs · BS EN 14465 · BS EN ISO 12947 - 2 (Martindale) rubs 200,000 Martindale · ASTM D4966 - 02 (Heavy Duty Upholstery) 200,000	
Pilling	scale 1-5 max. 5 · EN ISO 12945 - 2	
Maintenance	dry cleaning	
Flammability	EN 1021 1&2 · BS 5852 0&1 · CA TB 117 - 2013. Class Uno UNI 9175 Class 1 EMME Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contain no Flame Retardant chemical.	

Group C Kvadrat Remix 2

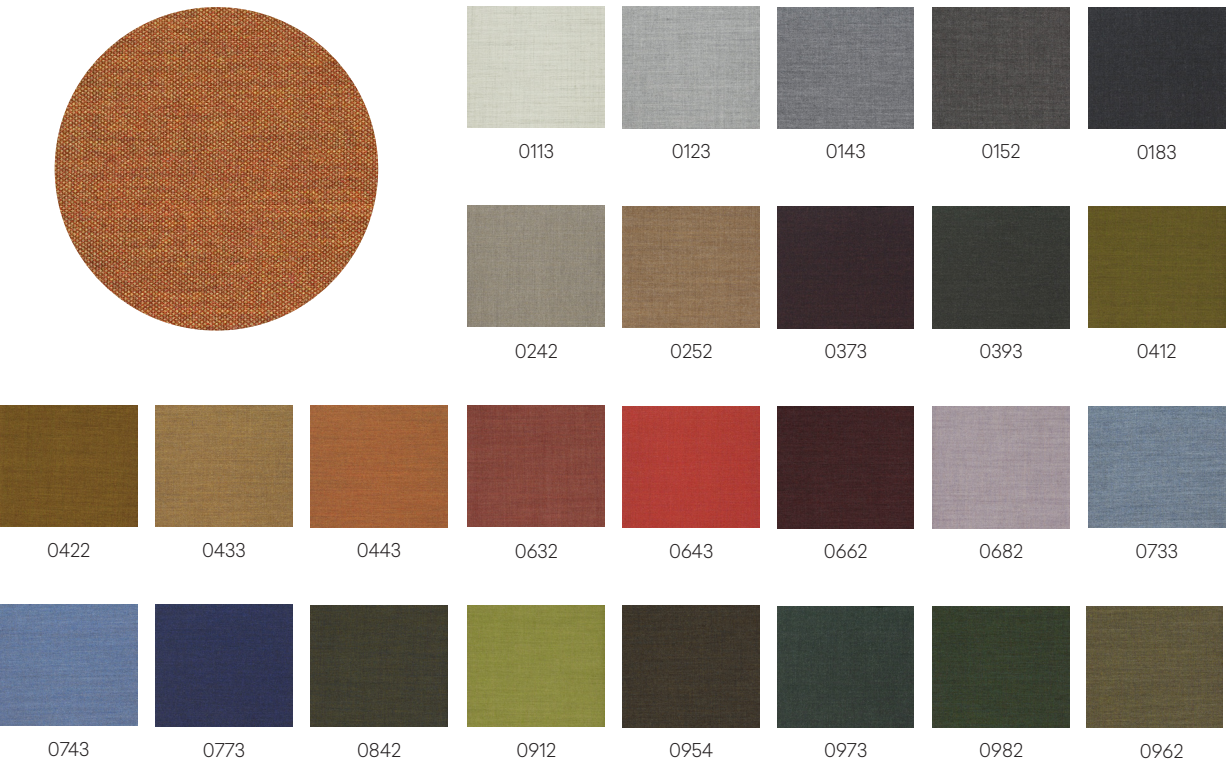


Material	New wool · Nylon	90% · 10%
Weight	415 g/lm · (14.63 oz/lin.yd.)	
Width	138 cm · (54")	
Abrasion resistance	rubs · EN ISO 12947 (Martindale)	100.000
Pilling	Note 4, EN ISO 12945	
Maintenance	Vacuuming and dry cleaning	
Flammability	AS/NZS 1530.3 · BS 5852 Crib 5 with treatment · BS 5852 part 1. EN 1021-1/2 · IMO FTP Code 2010: Part 8 · NF D 60 013 · NFPA 260. Önorm B1/Q1 · UNI 9175 1IM · US Cal. Bull. 117-2013. No use of brominated flame retardants	

Group D Kvadrat Divina Melange

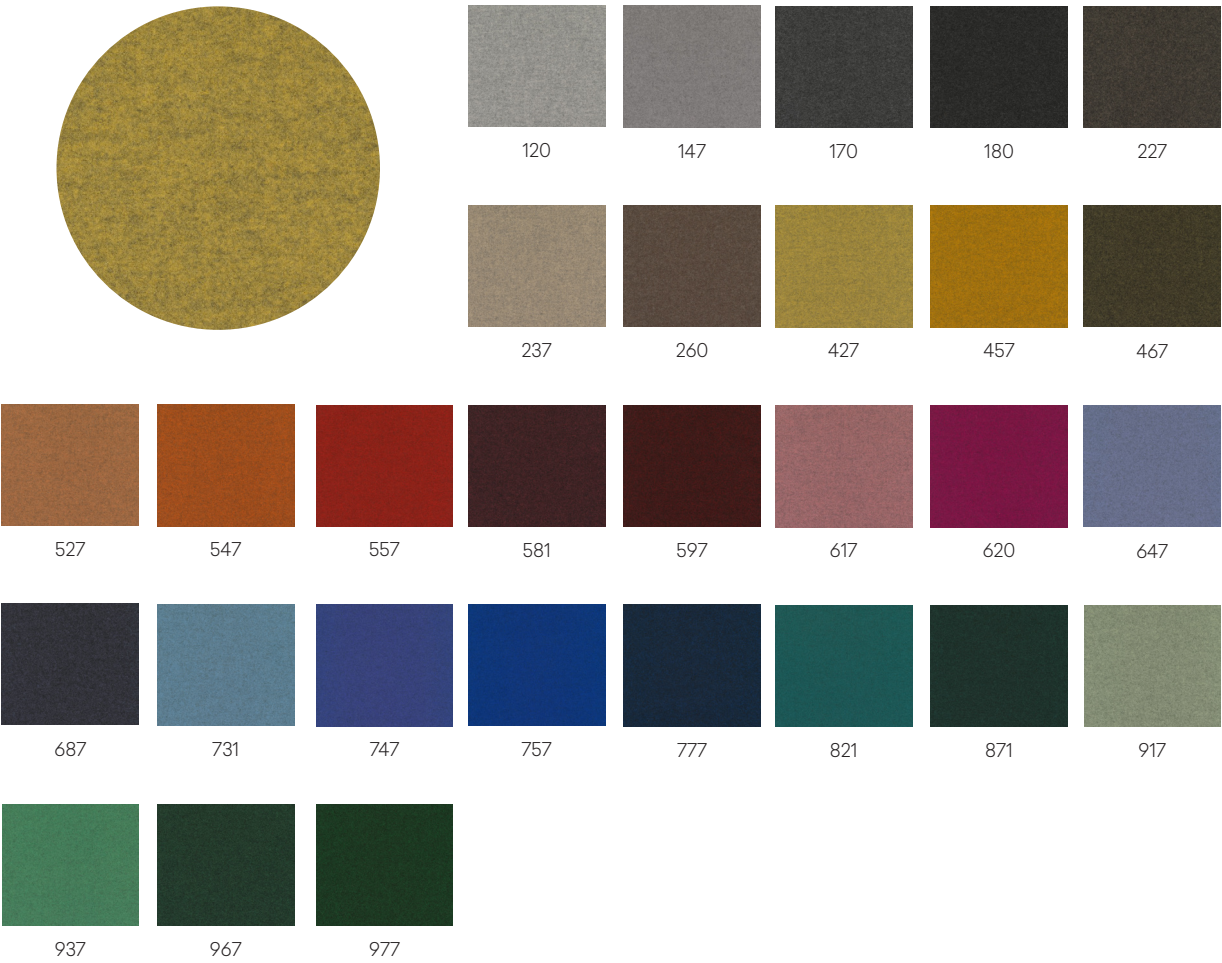

Material	New wool	100%
Weight	820 g/lin.m	
Width	150 cm · (59")	
Abrasion resistance	rubs · EN ISO 12947 (Martindale)	45.000
Pilling	Note 3, EN ISO 12945	
Maintenance	Vacuuming and dry cleaning	
Flammability	AS/NZS 1530.3, BS 5852 Crib 5, BS 5852 ignition source 3, BS 5852 part 1, BS 5867 part 2 type B, EN 1021-1/2, EN 13501, C-s1, d0, glued, NF D 60 013, NFPA 260, SN 198 898 5.3 with treatment *, UNI 9175 1IM, US Cal. Bull. 117-2013, ÖNORM B1/Q1	

Group D Kvadrat Steelcut Trio 3

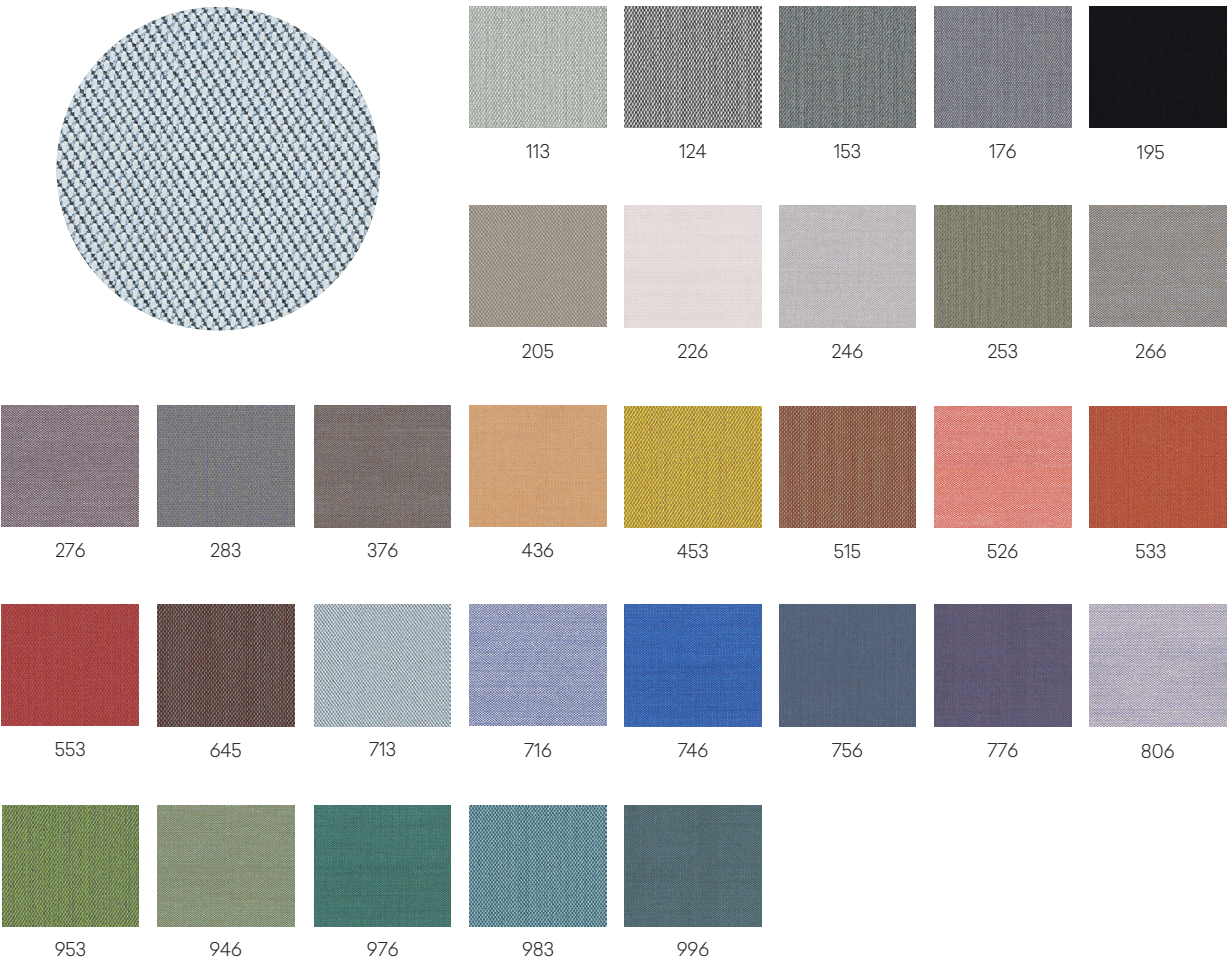

Material	New wool · Nylon	90% · 10%
Weight	770 g/lm · (27,16 oz/lin.yd.)	
Width	140 cm · (55")	
Abrasion resistance	ruhs · EN ISO 12947 (Martindale)	100.000
Pilling	Note 4, EN ISO 12945	
Maintenance	Vacuuming and dry cleaning	
Flammability	AS/NZS 1530.3 · AS/NZS 3837 class 2 · BS 5852 Crib 5 with treatment BS 5852 part 1 · DIN 4102 B2 · EN 1021-1/2 · IMO FTP Code 2010: Part 8 NF D 60 013 · NFPA 260 · Önorm B1/Q1 · SN 198 898 5.3 with treatment UNI 9175 1IM · US Cal. Bull. 117-2013 No use of brominated flameretardants	

