# Technical specifications (1/3)


# Green colors wood

By Javier Mariscal



Mobles114

# Technical specifications (2/3)

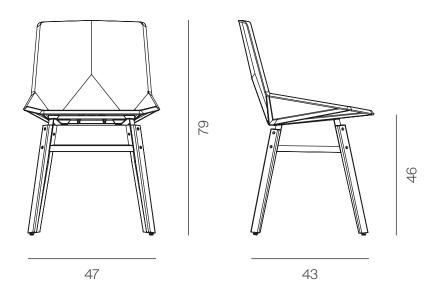

\*Metric unit cm

### **PRODUCT**

Units Weight

1 4 kg

### **PACKAGING**

Units	Weight	Dimensions	Volume
2	12 kg	51x52x70 cm	0,19 m <sup>3</sup>


All packaging is double recyclable cardboard. The chair is delivered disassembled in a box with two units.

### MATERIALS AND COLORS

Structure (steel) Legs (wood)

RAL 7044 Beech

### Seat (polypropylene)



## Technical specifications

#### CERTIFICATIONS AND REGULATIONS

Wood: Forest Stewardship Council (FSC)

Fire resistance: UNE-EN 1021-1 and UNE-EN 1021-2

Resistance public use: UNE-EN 15373:07

Resistance domestic use: UNE-EN 1728:01

External use: UNE-EN 581-1 and UNE-EN 581-2

#### MATERIALS AND FINISHES

#### Structure

Structure formed from a set of steel plates with a section of 25x4 mm welded together. Structure finished with epoxy powder paint 80 microns, 30% mat grey/beige RAL 7044.

Four solid beech wood legs, finished with water-based varnish without stain, are fixed to the structure using 8 M6x25 and M6x30 DIN7380 screws (supplied with glue application). The whole set is fixed to the casing with 4 white galvanized iron screws.

The whole set is fixed to the casing with 4 white galvanized iron screws.

### Seat

The chair's seat is made from injected polypropylene. Its typically anatomical shape makes it ergonomic and comfortable.

Hardwearing, elastic seat that is reinforced with spines at the back and underneath. For outdoor use, the seat has a hole in the centre to drain off rainwater.

UV filter for outdoor application.

The seat is available in three finishes: white RAL 9002, ocher RAL 1024 and orange RAL 2001.

### MAINTENANCE

Clean with a damp cloth with mild soap and water. Rinse and dry with a dry cloth. Avoid using abrasive products.